

$$\vec{t} = \sigma^T \hat{n} = \begin{bmatrix} \sigma_I & 0 & 0 \\ 0 & \sigma_{II} & 0 \\ 0 & 0 & \sigma_{III} \end{bmatrix} \begin{pmatrix} \hat{n}_1 \\ \hat{n}_2 \\ \hat{n}_3 \end{pmatrix} = \begin{pmatrix} \sigma_I \hat{n}_1 \\ \sigma_{II} \hat{n}_2 \\ \sigma_{III} \hat{n}_3 \end{pmatrix}$$

$$t_n = \vec{t} \cdot \vec{n} =$$

$$= \sigma_I \hat{n}_1^2 + \sigma_{II} \hat{n}_2^2 + \sigma_{III} \hat{n}_3^2 \quad | \quad 1$$

$$|\vec{t}|^2 = \overbrace{t_s^2 + t_n^2}$$

$$t^2 = t_n^2 + t_s^2 = (\sigma_I \hat{n}_1)^2 + (\sigma_{II} \hat{n}_2)^2 + (\sigma_{III} \hat{n}_3)^2 \quad | \quad 2$$

$$|\hat{n}| = 1 = \hat{n}_1^2 + \hat{n}_2^2 + \hat{n}_3^2 \quad | \quad 3$$

$$\begin{bmatrix} 1 & 1 & 1 \\ \sigma_I^2 & \sigma_{II}^2 & \sigma_{III}^2 \\ \sigma_I^2 & \sigma_{II}^2 & \sigma_{III}^2 \end{bmatrix} \begin{pmatrix} \hat{n}_1^2 \\ \hat{n}_2^2 \\ \hat{n}_3^2 \end{pmatrix} = \begin{pmatrix} 1 \\ t_n \\ t_s^2 + t_n^2 \end{pmatrix}$$

Solve

$$\hat{n}_1^2 = \frac{t_s^2 + (t_n - \sigma_{II})(t_n - \sigma_{III})}{\underbrace{(\sigma_I - \sigma_{II})(\sigma_{II} - \sigma_{III})}_{\geq 0}} \geq 0$$


$$\hat{n}_2^2 = \frac{t_s^2 + (t_n - \sigma_{III})(t_n - \sigma_I)}{\underbrace{(\sigma_{II} - \sigma_{III})(\sigma_{II} - \sigma_I)}_{\leq 0}} \leq 0$$

$$\hat{n}_3^2 = \frac{t_s^2 + (t_n - \sigma_I)(t_n - \sigma_{II})}{\underbrace{(\sigma_{III} - \sigma_I)(\sigma_{III} - \sigma_{II})}_{\geq 0}} \geq 0$$


$$\underbrace{\left[t_n - \frac{1}{2}(\sigma_{II} + \sigma_{III}) \right]^2}_{x^2} + \underbrace{t_s^2}_{y^2} \geq \underbrace{\left(\frac{1}{2}(\sigma_{II} - \sigma_{III}) \right)^2}_{r^2}$$

$$\left[t_n - \frac{1}{2}(\sigma_I + \sigma_{III}) \right]^2 + t_s^2 \leq \left(\frac{1}{2}(\sigma_I - \sigma_{III}) \right)^2$$

$$\left[t_n - \frac{1}{2}(\sigma_I + \sigma_{III}) \right]^2 + t_s^2 \leq \left(\frac{1}{2}(\sigma_I - \sigma_{III}) \right)^2$$

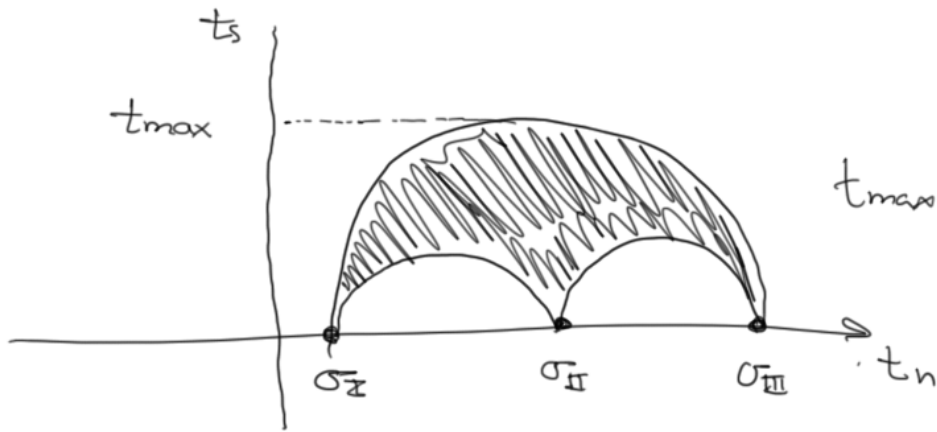

$$t_{max} = \frac{1}{2}(\sigma_I - \sigma_{III})$$

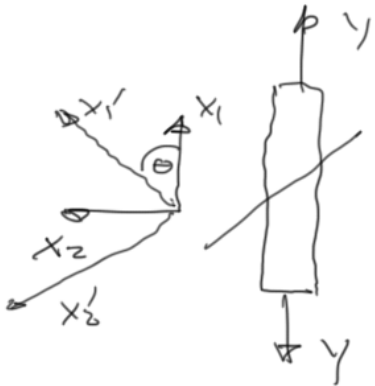


$$q = \begin{bmatrix} Y & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix}$$

$$R = \begin{bmatrix} \cos \theta & \sin \theta & 0 \\ -\sin \theta & \cos \theta & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

$$\sigma' = R \sigma R^T$$

$$\sigma'_{11} = Y \cos^2 \theta$$

$$\sigma'_{22} = \frac{Y}{2} \sin 2\theta \cos \theta = \frac{Y}{2} \sin 2\theta \quad \text{max at } 45^\circ$$

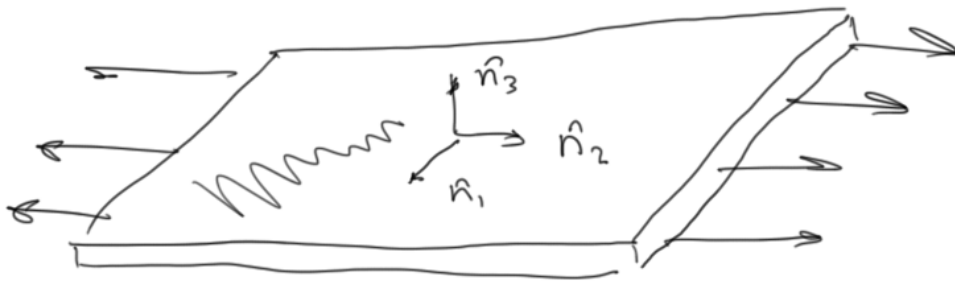


Plane stress



$$\vec{t} = \begin{bmatrix} \sigma_{11} & \sigma_{12} & \sigma_{13} \\ \sigma_{21} & \sigma_{22} & \sigma_{23} \\ \sigma_{31} & \sigma_{32} & \sigma_{33} \end{bmatrix} \begin{Bmatrix} 0 \\ 0 \\ 1 \end{Bmatrix} = \begin{Bmatrix} 0 \\ 0 \\ 0 \end{Bmatrix}$$

$$\sigma_{13} = \sigma_{23} = \sigma_{33} = 0$$


$$\sigma_{31} = \sigma_{32} = 0$$

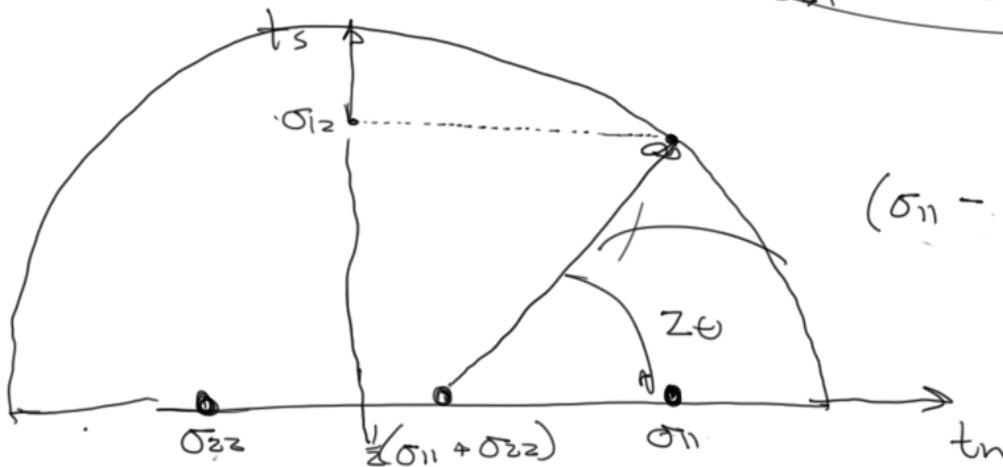

$$\left(\sigma_{11} - \frac{\sigma_{11} + \sigma_{22}}{2} \right)^2 + \sigma_{12}^2 = r_s^2$$

$$\tan(2\theta) = \left(\frac{2\sigma_{12}}{\sigma_{11} - \sigma_{22}} \right)$$

Plane strain

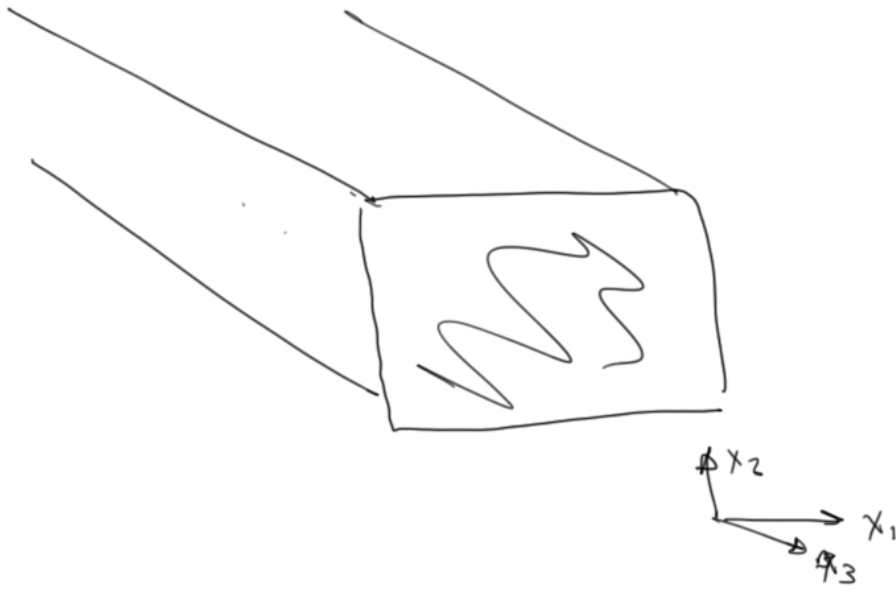

$$\epsilon_{33} = \frac{\Delta L}{L} = 0$$

$$\epsilon_{13} = \epsilon_{23} = \epsilon_{33} = 0$$

$$\epsilon_{31} = \epsilon_{32} = 0$$

$$\epsilon = \frac{1}{2}(\nabla u + \nabla u^T)$$

Symm. (∇u)